




MODEL: PFTX 1600-4

4-Pass Hot Water Packaged Firetube Boiler

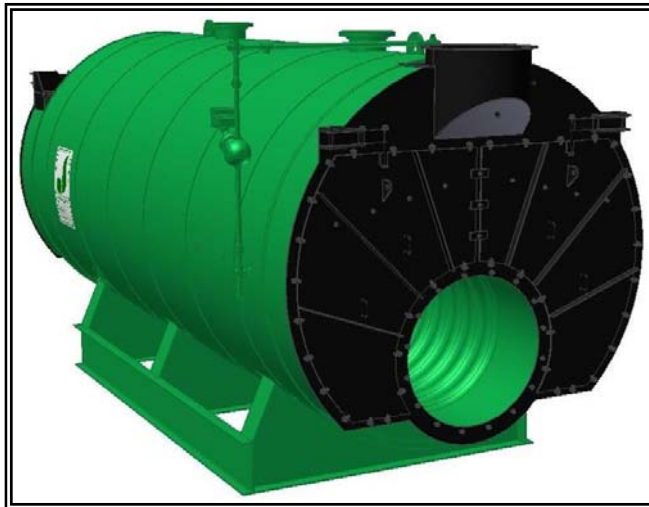


Ratings & Performance Data

Horsepower 1600		Natural Gas Flow, SCFH (1,000 Btu/ft ³)**		61,670		
Total Heating Surface, ft ²	8,088	Combustion Air (15% Excess), SCFM***		11,285		
Furnace Outside Diameter, in	53.5	Flue Gas Flow Rate, lb/hr***		53,779		
Furnace Heat Release Rate, Btu/ft ³ hr**	208,000	Stack Flue Gas Velocity, ft/min***		1,818		
Total Combustion Volume, ft ³	410.1	#2 Oil Flow, gal/hr (140,000 Btu/gal)**		424.7		
Total Heat Release Rate, Btu/ft ³ hr**	150,000	#6 Oil Flow, gal/hr (150,000 Btu/gal)**		392.5		
Water Content Flooded, gal	10,206	Flue Gas Side Pressure Drop, in. H ₂ O		11.3		
Approx. Dry Weight 30#, lb	94,400	Approx. Operating Weight 30#, lb		179,500		
Approx. Dry Weight 60#, lb	94,700	Approx. Operating Weight 60#, lb		179,800		
Approx. Dry Weight 125#, lb	98,000	Approx. Operating Weight 125#, lb		183,100		
Performance Data						
Operating Temperature (F)	Natural Gas		#2 Oil		#6 Oil	
	Stack Temp (F)	%Eff	Stack Temp	%Eff	Stack Temp (F)	%Eff
180	203	87.3	209	90.6	216	91.3
200	223	86.9	229	90.1	236	91.0
220	243	86.4	249	89.6	256	90.3
240	263	85.9	269	89.1	276	89.8
*Based on 20°F difference in supply/return, ** Values calculated at 200°F operating temperature, ***Calculated Firing Natural Gas						


Drawings - 4-Pass Hot Water Packaged Firetube Boiler

Connection & Opening Schedule			
Conn.	Description	Type	Qty
FW	Feedwater Inlet	2.00 FNPT	2
WS	Water Supply	14.00 150#RF	1
WR	Water Return	14.00 150#RF	1
DO	Drain Outlet	2.00 FNPT	2
MW	Manway	12 X 16	1
HH	Hand Hole	4 X 6	7

Supply and return outlets ASME flanged drilling

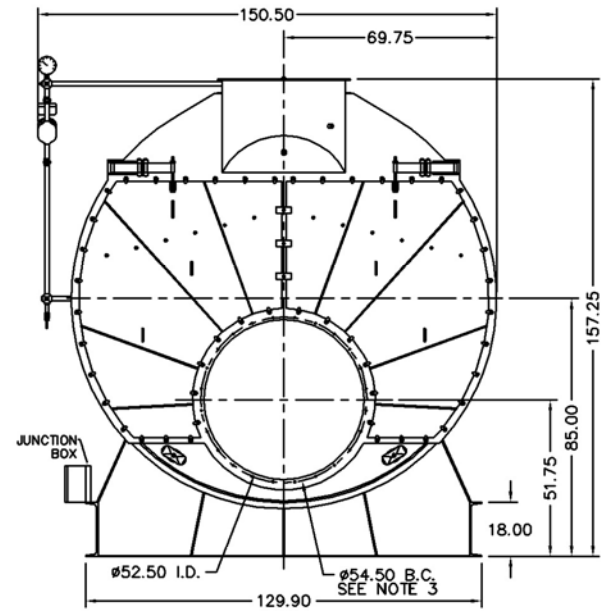


NOTE: (24) 5/8 UNC X 1.500 LONG STUDS EQUALLY SPACED STRADDLE CENTERLINES. STUDS FOR BURNER REFRACTORY (DRY OVEN) MOUNTING. REFRACTORY MUST EXTEND 27.00" MINIMUM PAST MOUNTING FLANGE.

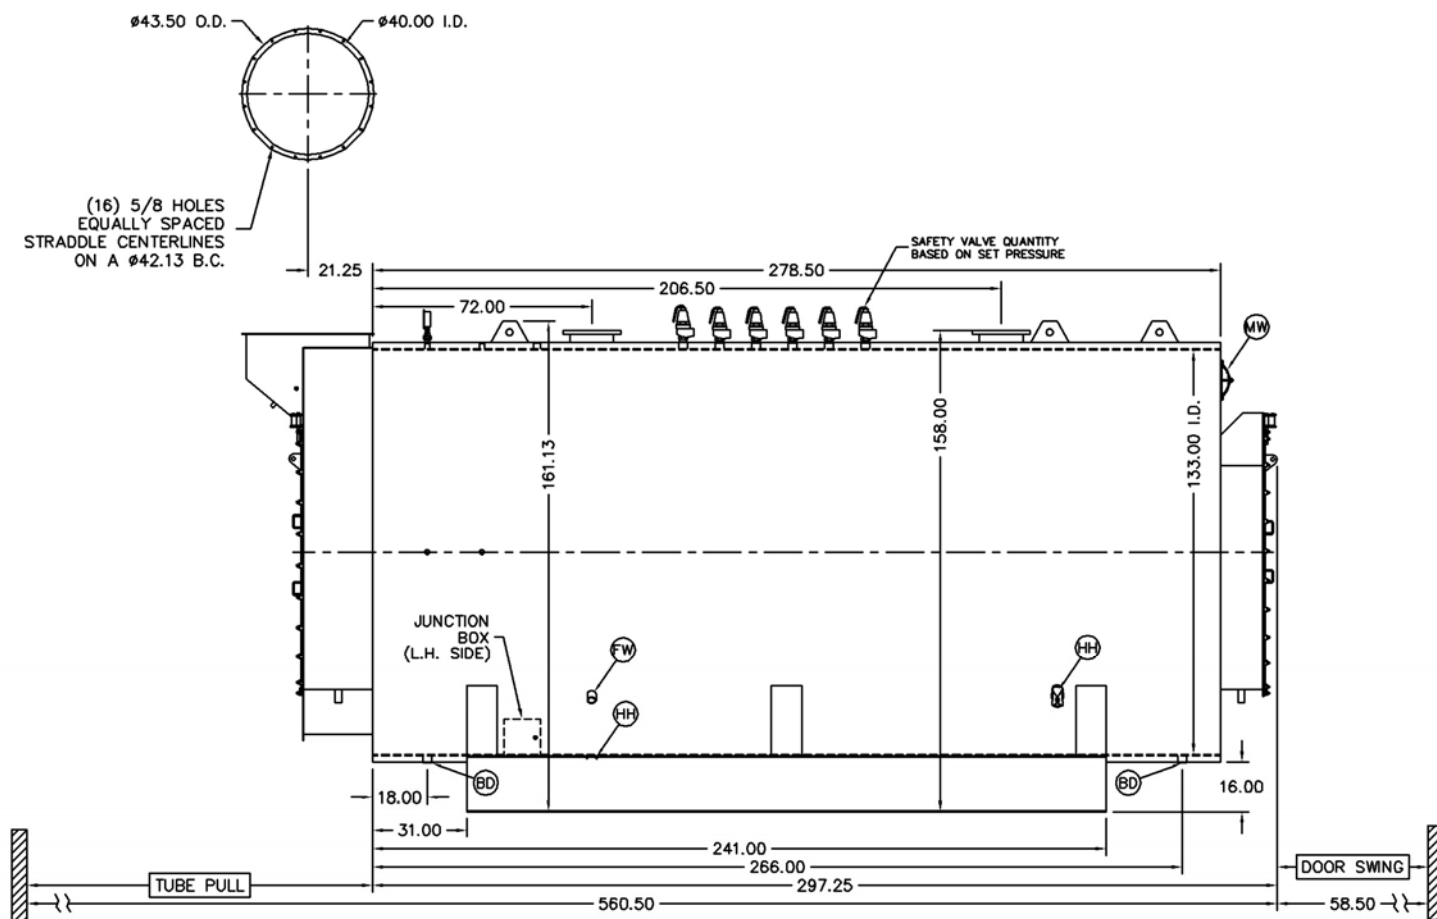

Notes:
 30# Hot Water design shown, all dimensions given in inches.
 Fuel piping and/or optional boiler trim may increase overall width.
 Specifications subject to change to incorporate engineering advances.

MODEL: PFTX 1600-4

Base Diagram

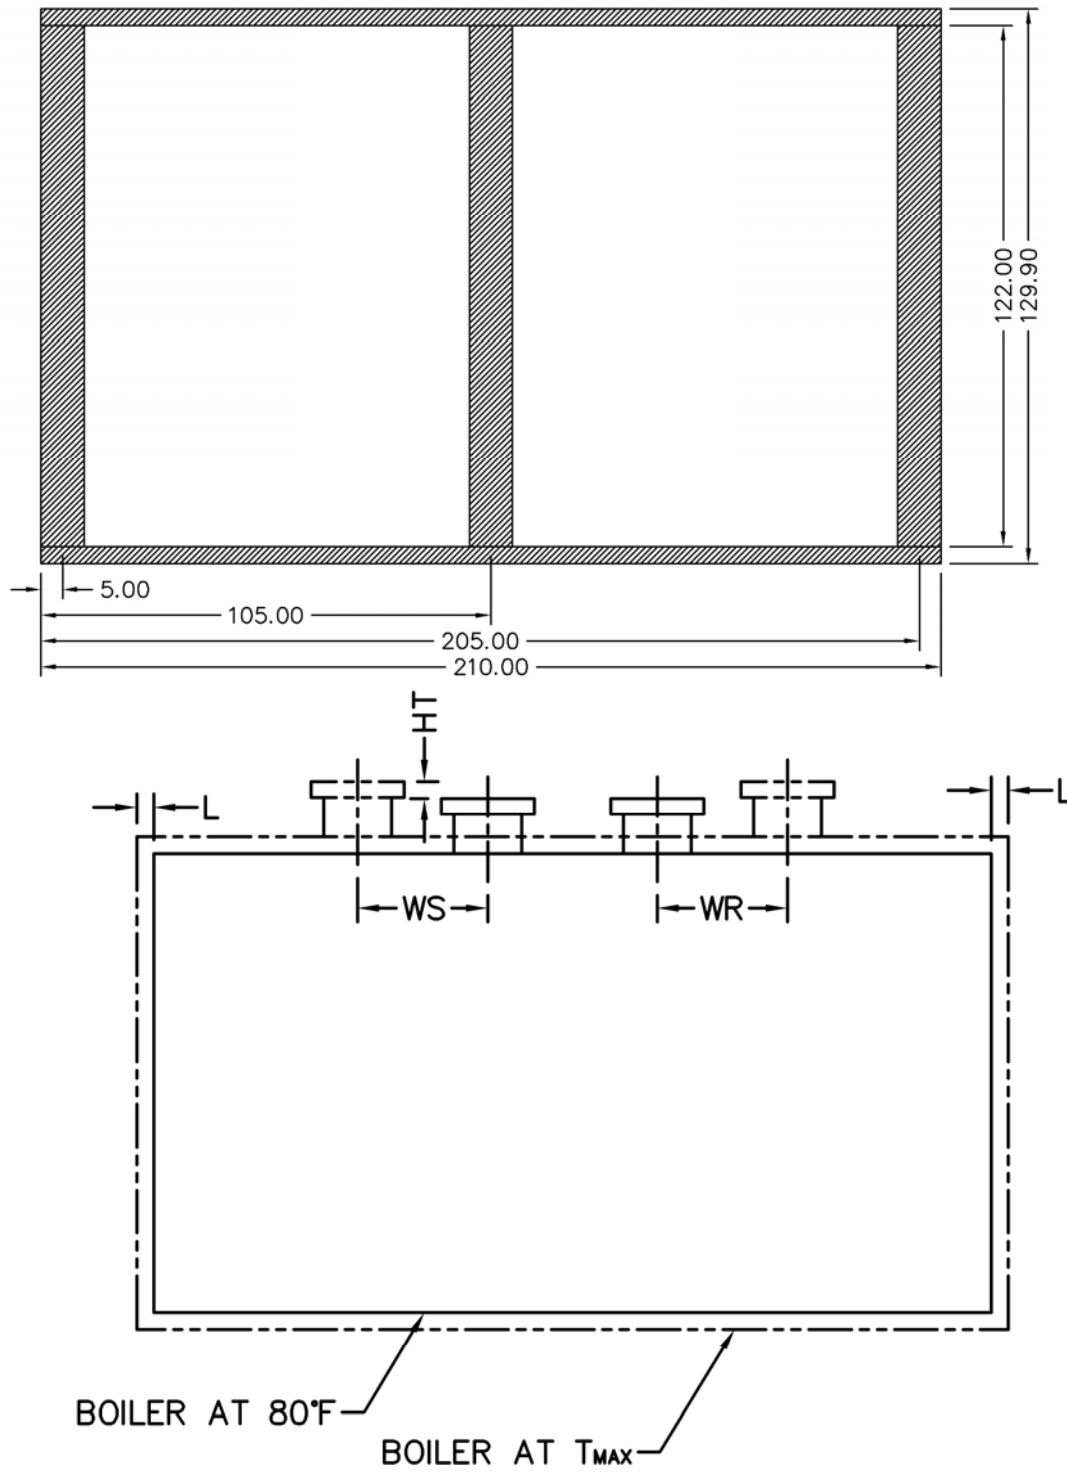


Thermal Expansion				
Metal T _{MAX} (F)	180	200	220	240
L (in)	0.081	0.097	0.113	0.129
WS (in)	0.030	0.036	0.042	0.048
WR (in)	0.057	0.069	0.080	0.092
HT (in)	0.080	0.096	0.112	0.128

MODEL: PFTX 1600-4

Nozzle Loadings

Maximum Allowable Load on Outlet & Return Nozzles				
	30# Design	60# Design	125# Design	160# Design
F_{RRF} , lb	5,675	4,055	7,120	10,155
M_{RCM} , in-lb	67,535	67,535	123,845	208,520
M_{RLM} , in-lb	96,035	68,680	102,560	162,545

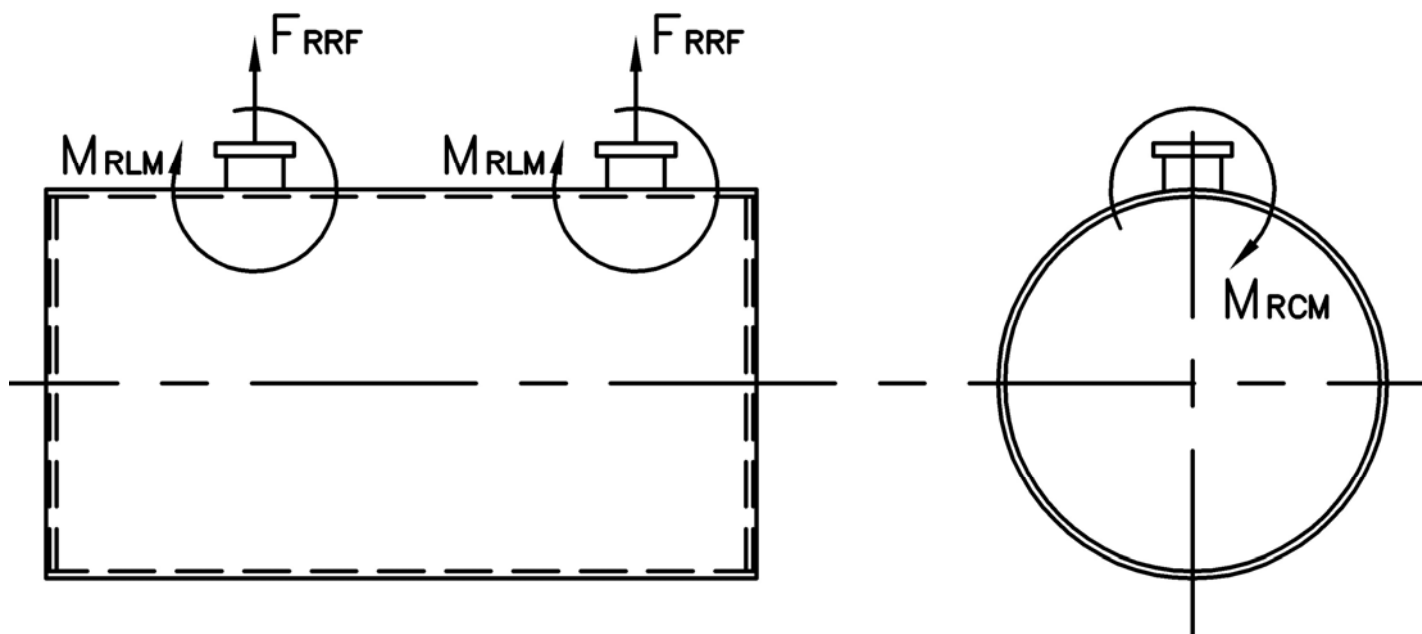

Distributed By:



300 Pine Street
P.O. Box 300
Ferrysburg, MI 49409-0300
Telephone: (616) 842-5050
Net: www.johnstonboiler.com

Printed Feb. 2008